


3. Install the new filter cartridges.
  - Insert the “A” cartridge with the nipple-end first. **Then, press and rotate to seat properly.**
  - Install the “B” cartridge by inserting the nipple into the “B” cap
4. Tighten the threaded filter caps firmly in the opposite direction of the arrows shown on the caps
  - The “A” cap will tighten by turning it to the left
  - The “B” cap will tighten by turning it to the right
- Ensure O-ring is in place

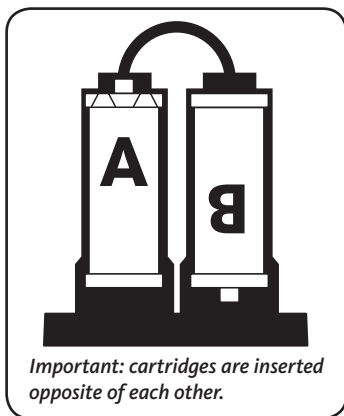


5. Turn on the cold water and check for leaks with the filter still lying flat
  - If leaks are noticed, repeat step 3 and 4
  - If no leaks are noticed, return the filter to the upright position and allow the water to run for 10 minutes until all cloudiness and discoloration have disappeared
6. Enjoy the benefits of drinking clean, healthy water!

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

- Conforms to NSF/ANSI 53 for VOC reduction. See performance data sheet of individual contaminants and reduction performance.
- Systems certified of cyst reduction may be used on disinfected waters that may contain filterable cysts.
- Rated capacity: 500 Gallons

aq4035install\_2011103

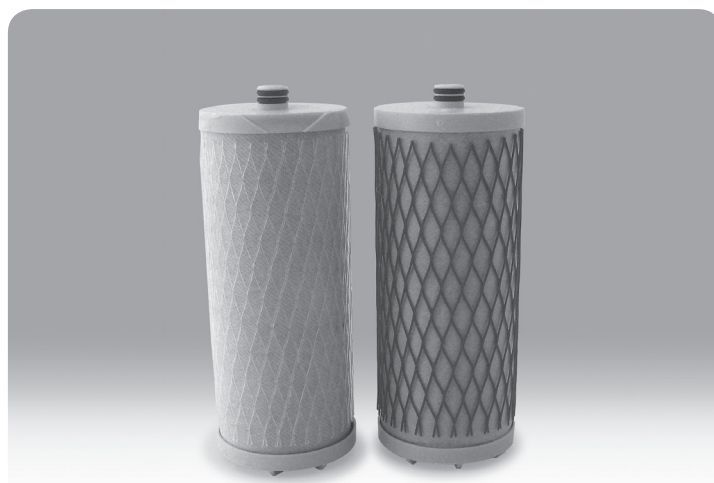

### Model AQ-4035


## Replacement Cartridge Instructions

for use with AQ-4000, AQ-4000W, AQ-4000B, AQ-4000P\*, AQ-4500\*, AQ-4501\*, AQ-4600\*, and AQ-4601\*

Sun Water Systems | [www.aquasana.com](http://www.aquasana.com)  
 6310 Midway Road | Haltom City, Texas 76117  
 USA 866.662.6885 | Canada 877.332.7873

\*not covered by NSF certification

3. Install the new filter cartridges.
  - Insert the “A” cartridge with the nipple-end first. **Then, press and rotate to seat properly.**
  - Install the “B” cartridge by inserting the nipple into the “B” cap
4. Tighten the threaded filter caps firmly in the opposite direction of the arrows shown on the caps
  - The “A” cap will tighten by turning it to the left
  - The “B” cap will tighten by turning it to the right
- Ensure O-ring is in place

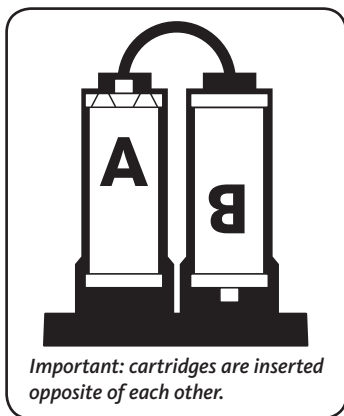

5. Turn on the cold water and check for leaks with the filter still lying flat
  - If leaks are noticed, repeat step 3 and 4
  - If no leaks are noticed, return the filter to the upright position and allow the water to run for 10 minutes until all cloudiness and discoloration have disappeared
6. Enjoy the benefits of drinking clean, healthy water!

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

- Conforms to NSF/ANSI 53 for VOC reduction. See performance data sheet of individual contaminants and reduction performance.
- Systems certified of cyst reduction may be used on disinfected waters that may contain filterable cysts.
- Rated capacity: 500 Gallons

aq4035install\_2011103



### Model AQ-4035

## Replacement Cartridge Instructions

for use with AQ-4000, AQ-4000W, AQ-4000B, AQ-4000P\*, AQ-4500\*, AQ-4501\*, AQ-4600\*, and AQ-4601\*



Sun Water Systems | [www.aquasana.com](http://www.aquasana.com)  
 6310 Midway Road | Haltom City, Texas 76117  
 USA 866.662.6885 | Canada 877.332.7873

\*not covered by NSF certification

## For Countertop filters (AQ-4000 series)

1. Place the filter system on a flat surface and remove the threaded filter caps by turning in the direction of the arrows. To loosen, turn A cap to the right and B cap to the left.
2. Remove old filter cartridges and dispose of them in the trash. Reuse existing large O-rings as they have a 10-year lifecycle.

*Tip: to assist with "A" cartridge removal, you may use the old "B" cartridge ribs to twist "A" so it will release from the housing.*

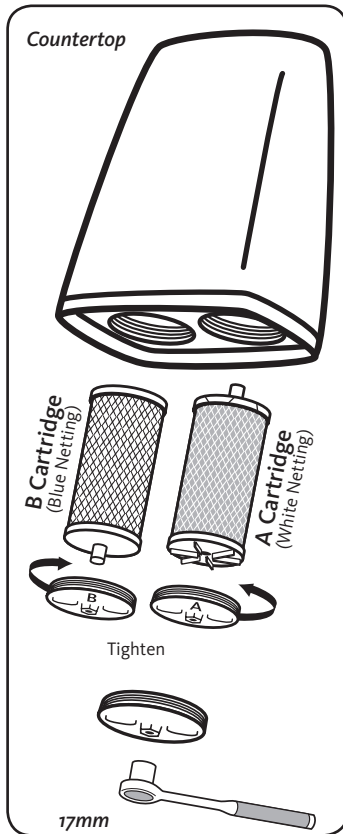


↓ proceed to step 3


## For Under Counter filters (AQ-4600 & AQ-4601)

1. Remove the hoses by pressing and holding down the gray collet ring while pulling the hose out. Remove the threaded filter caps by turning the white A knob to the right and the blue B knob to the left.
2. Remove old filter cartridges and dispose of them in the trash. Reuse existing large O-rings as they have a 10-year lifecycle.

*Tip: to assist with "A" cartridge removal, you may use the old "B" cartridge ribs to twist "A" so it will release from the housing.*

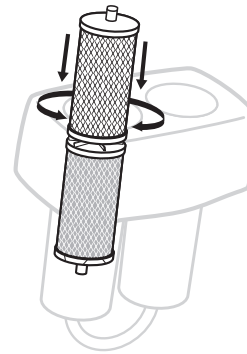



↓ proceed to step 3

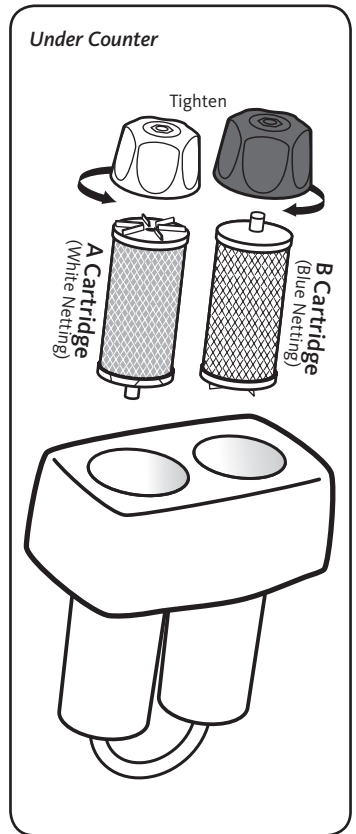

## For Countertop filters (AQ-4000 series)

1. Place the filter system on a flat surface and remove the threaded filter caps by turning in the direction of the arrows. To loosen, turn A cap to the right and B cap to the left.
2. Remove old filter cartridges and dispose of them in the trash. Reuse existing large O-rings as they have a 10-year lifecycle.

*Tip: to assist with "A" cartridge removal, you may use the old "B" cartridge ribs to twist "A" so it will release from the housing.*

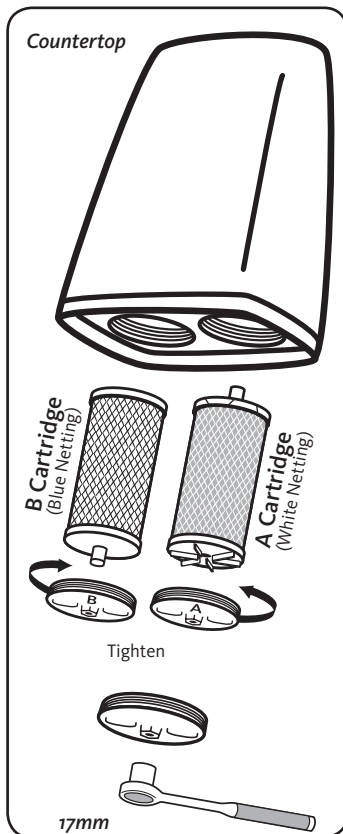


↓ proceed to step 3

## For Under Counter filters (AQ-4600 & AQ-4601)

1. Remove the hoses by pressing and holding down the gray collet ring while pulling the hose out. Remove the threaded filter caps by turning the white A knob to the right and the blue B knob to the left.
2. Remove old filter cartridges and dispose of them in the trash. Reuse existing large O-rings as they have a 10-year lifecycle.

*Tip: to assist with "A" cartridge removal, you may use the old "B" cartridge ribs to twist "A" so it will release from the housing.*



↓ proceed to step 3

